


# ITScript Net® - Port Forwarding

~~~~

The ITScriptNet OMNI server is typically located on a machine that is inside the firewall. Where the device's connection to the central server is outside the firewall to a router (such as when using RAS), the router must be configured to **forward the port**.


The IP address that is visible outside the firewall is the *External* IP address of a router or firewall. The router/firewall must be configured to allow traffic for port **61200** (the default ITScriptNet communications port) forwarded to the machine running the ITScriptNet OMNI server. The Host IP address in the ITScriptNet configuration on each mobile device will need to be set to the *external* IP address of the router.

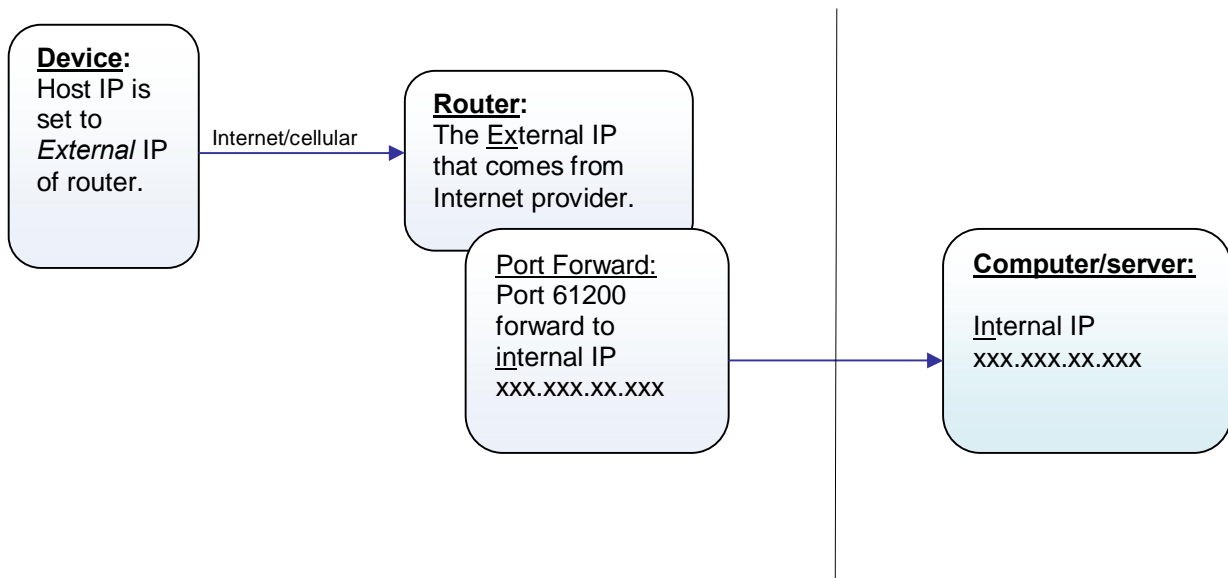

The two IPs should NOT be the same; they should be different. One is the internal IP to your computer, the other should be the *external* IP address that is provided by your Internet service provider. Then, on the mobile device, the IP address to the host IP that is set in the ITScriptNet configuration screen is the *external* IP address, not the internal address on your computer/server.

All routers are different - we won't know anything about your particular router or what the router settings should be.

Your router's user guide should give you more information.

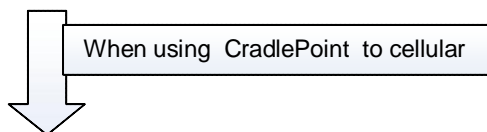

# ITScript Net® - Port Forwarding

~~~~

